RECESSED PAR38MH LV TRIMLESS

Catalog #

Type

Project

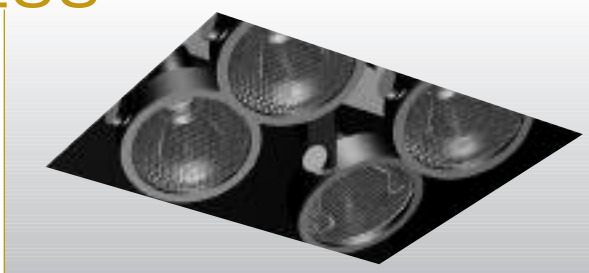

COMBOLIGHT® LV Series

FOUR (4) Light Square Recessed
Next Generation Trimless
Multi-Lamp Luminaire
PAR38 Metal Halide

DESCRIPTION:
An adjustable PAR38MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:
All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:
4 - PAR38MH lamps mounted in adjustable bezels in a 2 x 2 square configuration. Each lamp can accept up to two optical accessories. 380º x 45º locking adjustment. Fixture provides 45º visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:
Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:
Integral Aromat® electronic metal halide ballsts. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
	23.50"	9.02"	17.73"	17.73"	23.48"	23.48"	25.68"	29.03" x 29.03"

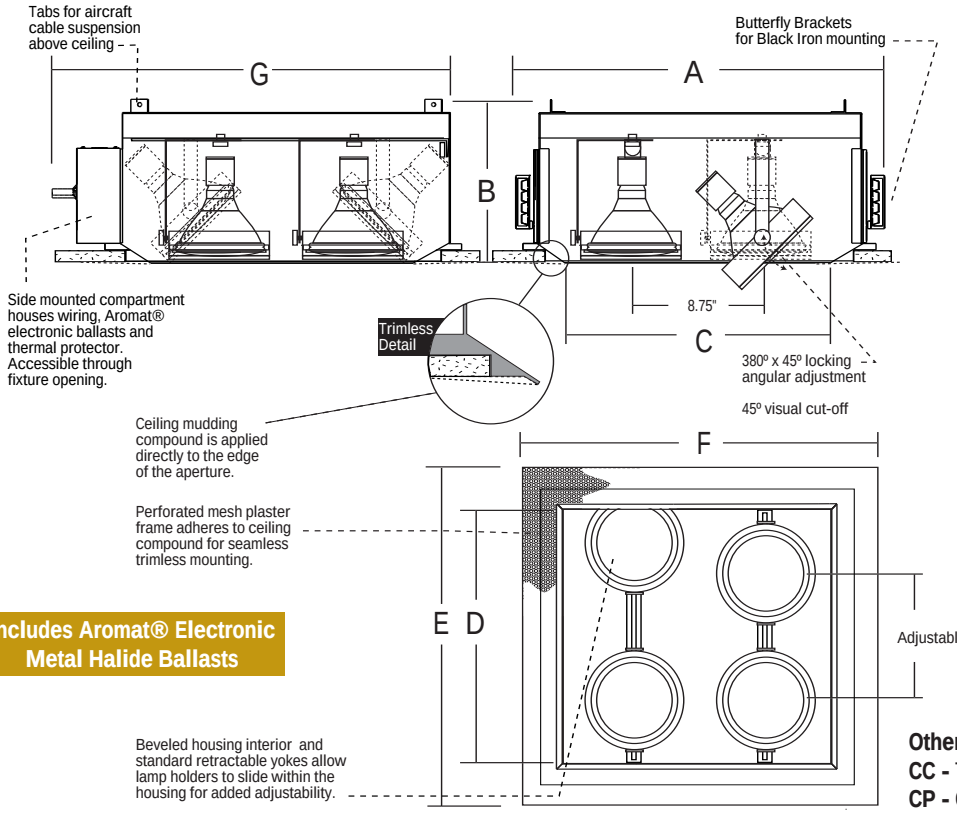
Tabs for aircraft cable suspension above ceiling
Butterfly Brackets for Black Iron mounting
G
A
B
8.75"
C
Side mounted compartment houses wiring, Aromat® electronic ballasts and thermal protector. Accessible through fixture opening.
Trimless Detail
380º x 45º locking angular adjustment
45º visual cut-off
Ceiling mudding compound is applied directly to the edge of the aperture.
F
Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting.
E D
Adjustable
Beveled housing interior and standard retractable yokes allow lamp holders to slide within the housing for added adjustability.

Includes Aromat® Electronic Metal Halide Ballasts

Other Adders
CC - Two Circuit
CP - Chicago Plenum

ORDERING EXAMPLE: *LV840MHSQ* | *WH* | *70* | *120*

= Four Light Square Trimless Recessed PAR38MH - White Interior - 70 watt lamps - 120 Volt

Optional Accessories - Details on Other Side

Baffle	Snoots	Louvers	Lenses

Cat. # / Description	Interior Finish	Lamp Wattage	Voltage
LV840MHSQ : 4 Light Square Recessed Next Generation Trimless Combo Fixture PAR38MH	**BK -** Black	**70 -** 70 Watt PAR38MH	**120 -** 120 Volt (Standard)
	WH - White	**100 -** 100 Watt PAR38MH	**277 -** 277 Volt
	S - Silver		
	PT - Custom (Specify)		

SPECIFY-	LV840MHSQ	____	____	____

COOPER Lighting

Specifications and Dimensions subject to change without notice.

RSA Lighting • 7945 Orion Ave. • Van Nuys, CA 91406 • 818-349-3030 • FAX 818-349-3031

RSA LIGHTING